



# INSTALL INSTRUCTIONS

## Satellite communicator

### 1 Device installation:

- 1.1 The device comes with a special bag with two side strings to secure the device to a mast using velcro strips.
- 1.2 The device must be placed outdoor, away from transmission devices and in such a position as to ensure the maximum sky visibility.
- 1.3 The device antenna is on the side with the adhesive number and this side must be placed horizontally towards the sky. If not possible to install horizontally, install it vertically on a chandelier with the adhesive side towards the exterior of the vessel.
- 1.4 Finally secure the device using the safety rope string.


**WARNING:** If the antenna side is not installed towards sky position or if it's covered by other objects transmission may not work properly.



### 2 Device activation / deactivation:

- 2.1 The device must be activated only after it has been placed on board in outdoor position and behind the boat.
- 2.2 Safely unscrew the two fixing screws on the device cap, remove and rotate 180° and reposition the cap as to make visible the **ON** text on the bottom right side of the cap (see picture at right). Viceversa, to deactivate the device rotate the cap as to make visible the text **OFF**.

**WARNING:** Always activate the device outdoor, otherwise the device may freeze, malfunction and even be damaged. For the same reason always deactivate the device before taking it indoor and return it.

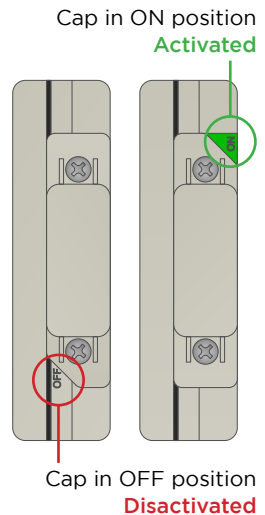

### 3 What to do if the device is not transmitting after correct positioning?

- 3.1 Remove the activation cap and check if the contact pins in the device are not damaged.
- 3.2 Place the activation cap to **OFF**, wait 1 minut and reposition to **ON**.
- 3.3 Check if position arrives in Livetrack application within 15 minutes.  
If necessary repeat the deactivation/activation procedure again.



**SGS TRACKING**

Via Pedullà 59 - 16165 Genoa - Italy

P +39 010.8301222 | F +39 010.8301278 | info@sgstracking.com | www.sgstracking.com